

Description

Fanvil X303-2 Wire IP Phone is an upgraded version of the original IP phone, featuring a brand-new power and network supply method using a 2-Wire connection. This allows for complete reuse of old wiring while offering high-definition voice, a 2.4-inch color display, support for 4 SIP accounts, 2-Wire power and network supply, multi-party conferencing, and other rich features. Additionally, it supports external EHS wireless headsets and other expansion functions, making it suitable for various enterprise application scenarios and providing an excellent user experience.

Main Features



It connects via an RJ11 interface and supports 2-Wire power and network supply



2.4-inch 320x240 pixel color display



Support audio codec G.722 and Opus, HD voice on speakerphone and handset




Supports 6-party conferencing and EHS wireless headset



Supports desktop and wall-mounted installation



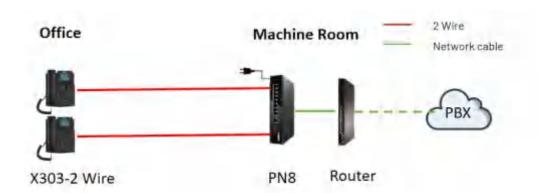

Specifications

Scenario	Office, Hospital, Apartment
Screen/Keyboard	2.4i-nch color screen 320×204 4 Soft-Keys 9 Function keys (Hold/Transfer/Voice message/Conference/Phonebook /MWI/Headset/Redial/Hands-free) 3 Line keys (with LED indicator light) 4 Navigation keys + 1 OK key 12 Standard phone digits keys 3 Volume control keys (Up/Down/Mute (Microphone))
Body	Plastic
Color	Black
Status Light	1 (Red)
Interface	Wire interface (6P2C RJ11 interface) Power interface RJ9 interface (Handset x1, Headset x1) Security Slot x1
Power	DC 12V/1A 2-Wire PoE Switch supply power
Size	Desktop Stand (45°): 169x203.6x172.7 mm Desktop Stand (50°): 169x194x181 mm Wall mountable: 169x113.4x207.6 mm
Working Temperature	0°C~+45°C
Installation	Desktop Wall mountable (Need to purchase accessories separately)

Functional Capabilities

Protocols	SIP2.0 over UDP/TCP/TLS, RTP/RTCP/SRTP, STUN, DHCP, IPv6, LLDP, PPPoE, 802.1x, L2TP, OpenVPN, SNTP, FTP/TFTP, HTTP/HTTPS, TR-069, AES128 & AES256
Video	HD Voice Microphone/Speaker (Handset/Hands-free, 0 ~ 7KHz Frequency Response) Wideband ADC/DAC 16KHz Sampling Narrowband Codec: G.711a/u, G.723.1, G.726, G.729A/B, iLBC Wideband Codec: G.722, Opus Full-duplex Acoustic Echo Canceller (AEC) Voice Activity Detection (VAD) / Comfort Noise Generation (CNG) / Background Noise Estimation (BNE) / Noise Reduction (NR) / Automatic Gain Control (AGC) Packet Loss Concealment (PLC) Dynamic Adaptive Jitter Buffer DTMF: In-band, Out-of-Band (RFC2833/ SIP INFO) VQM voice quality monitoring

	IP Mode: IPv4/IPv6
Network	IP Configuration: Static IP / DHCP / PPPoE
	Network Access Control: 802.1x
	VPN: L2TP / OpenVPN
	VLAN
	LLDP
	QoS
	RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
	Local Phonebook (1000 entries)
	Remote Phonebook (XML/LDAP, 1000 entries)
	Call logs (In/Out/Missed, 600 entries)
	Blocked List/Allowed List
Phone Functions	Screen saver
	Voice Message Waiting Indication (VMWI)
	Programmable DSS/Soft keys
	Network Time Synchronization
	Support Plantronics wireless headset (Through Plantronics APD-80 EHS Cable)
	Support Jabra wireless headset (Through Fanvil EHS20 EHS Cable)
	Support Recording (Through Server)
	Action URL / Active URI
	uaCSTA
	Call out / Answer / Reject
Call Functions	Mute / Unmute (Microphone)
	Call Hold / Resume
	Call Waiting
	Intercom
	Caller ID Display
	Speed Dial
	Anonymous Call (Hide Caller ID)
	Call Forward (Always/Busy/No Answer)
	Call Transfer (Attended/Unattended)
	Call Parking/Pick-up (Depending on server)
	Redial
	Do-Not-Disturb
	Auto-Answering
	Voice Message (With server)
	6-way Conference
	Hot Line
	Hot desking
Deployment Management	Auto-Provisioning via FTP/TFTP/HTTPS/DHCP OPT66/SIP PNP/TR-069
	Web Management Portal
	Web-based Packet Dump
	Configuration Export / Import
	Phonebook Import/Export
	Firmware Upgrade
	Syslog